


SLAB SCISSOR LIFTS S2632E/2646E/3246E

DIMENSIONS	S2632E	S2646E	S3246E
Max. working height	10.0m	10.0m	11.8m
Max. platform height (A)	8.0m	8.0m	9.75m
Platform size (stowed)	0.74m x 2.31m	1.14m x 2.38m	1.14m x 2.38m
Platform size (extended)	0.74m x 3.22m	1.14m x 3.30m	1.14m x 3.30m
Deck extension length (B)	0.91m	0.91m	0.91m
Overall width (C)	0.81m	1.16m	1.16m
Stowed length (D)	2.37m	2.54m	2.54m
Stowed height (E)	2.33m	2.36m	2.51m
Stowed height (guardrails folded)	1.93m	1.67m	1.82m
Wheelbase	1.92m	1.9m	1.9m
Ground clearance (stowed)	63mm	101mm	101mm
Ground clearance (elevated)	19mm	25mm	25mm

PERFORMANCE			
Platform capacity (SWL)	227kg	454kg	317kg
Max. operating wind speed (1 person on platform)	12.5m/s	12.5m/s	12.5m/s
Max. drive height	8.0m	7.90m	9.75m
Max. drive speed (elevated)	0.6km/h	0.8km/h	0.8km/h
Max. drive speed (stowed)	3.2km/h	3.2km/h	3.2km/h
Raise/lower time	20/26sec	35/60sec	50/60sec
Gradeability	25%	25%	25%
Inside turning radius	0.25m	0.25m	0.25m
Outside turning radius	2.34m	2.5m	2.5m
Tyres	38.1cm x 12.7cm non-marking solid rubber		
Controls	one-hand proportional joystick		
Drive system	dual front wheel hydraulic motors		

POWER			
Power source	24V 4hp DC electric motor	4 x 6V 240 Ah batteries	

WEIGHT			
Gross weight	2,224kg	2,359kg	3,003kg

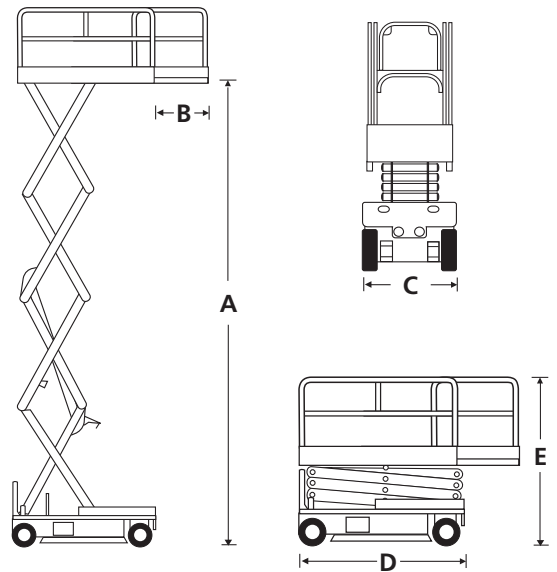


STANDARD FEATURES

- Proportional controls
- 0.9m extension deck
- Tilt alarm
- Swing-out service trays
- Power line to platform (no sockets)
- Horn
- Hour meter
- CE approved

OPTIONS

- Special paint colors
- Flashing light
- 110V AC 900w inverter generator
- Panel carrier

TURNING RADIUS

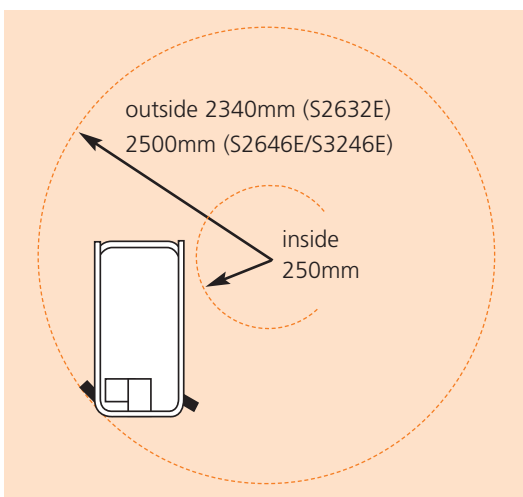

snorkel www.snorkellifts.com

11 Meakin Road,
Meadowbrook,
Qld, 4131. Australia.
t: 07 3489 7000
e: sales@snorkellifts.com